




EIT International is an industry leader in the development and supply of environmentally friendly preventative controls and detection systems for the liquid food processing, nutraceutical, pharma-medical and petrochemical industries.



Handheld bacteria and biofilm detection system

Environmentally friendly wave altering UV to quickly identify areas harbouring bacterial contaminants such as E.coli, listeria and salmonella which are often missed under standard white light or UV lamp.

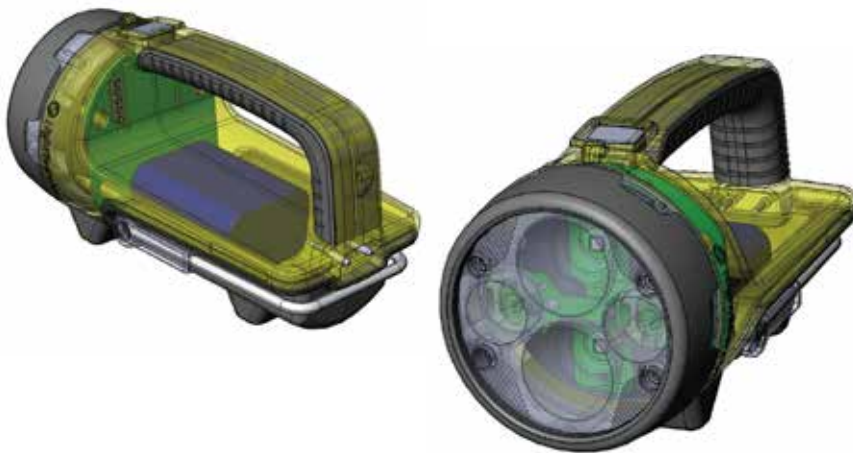

Industry compliant
Bactiscan™ conforms to GMP and CIP requirements with an IP67 rating and is drop test certified to 1.5 meters.



Normal View
Item looks clean and normal under white light or standard UV



Bactiscan™ View
Clearly reveals contamination

Food production managers are relied upon to make a critical decision every day: whether to start production or not. The fundamental worry is the hygiene of the facility. Every hour production is stalled for cleaning and potential revenue is lost. However, if production is conducted on a surface that hasn't been adequately cleaned, the risk of contamination and costly recalls increases dramatically.

Food processors have a common problem in detecting bacteria and biofilms that could contaminate the end product. Currently, processors use ATP tests for measuring actively growing microorganisms through detection of adenosine triphosphate, or ATP. Although this process is good, it is not fool proof due to the minute size of physical swab point compared to overall volume of surface, and the physical swab procedure is cumbersome. Other technologies include florescent markers and gels; however, these are not environmentally friendly and, again, due to minute size of physical test area a true result is impossible to gauge.

These contaminants are often undetectable using other methods such as white light and UV lamps. With Bactiscan™ you can light up the entire surface and get an immediate result, so within seconds you can pick things up that would take hours with any other method.

Next generation Bactiscan™ will include video monitor for scan capture, date time stamp, pass/fail stamp and validating scans against known areas of contamination. Bactiscan™ 2 will support on-line validation system that will upload to existing internal quality process for external audit.



Runtime	
Product	Bactiscan™
Power On	1h 30min
Charge Time	6hrs 30mins
IP Rating	IP67
Battery	7.4V 6.6Ah Li-ion
Impact Resistance	1.5 Metres
Charge Base	Yes
Dimensions	250 x 125 x 120 (mm)
Weight	1.0KG

For enquiries or to request a quote, please contact your authorised EIT International distributor at:

Bactiview

Bactiview Ltd.
20 Trenchard Court, Ayr, KA7 1JU, United Kingdom

GHj Y5`UFxjW`Tel: \$7788 445773`E-mail: steve@bactiview.com

BjW`<c`ck Um`HY. \$+++\$, ' (, ')9!a Uj`/b]W.4 VUWj Y]k `W:a

FjW UfX`6 i f_Y HY. 07764 853428 E-mail; richard@bactiview.com